
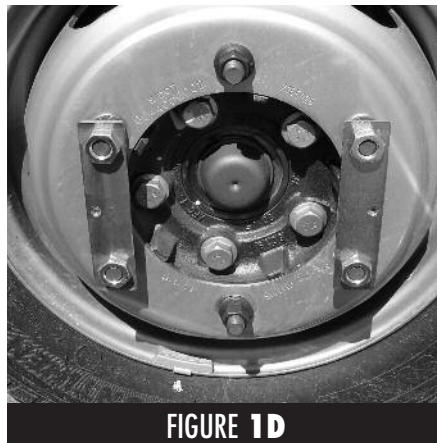
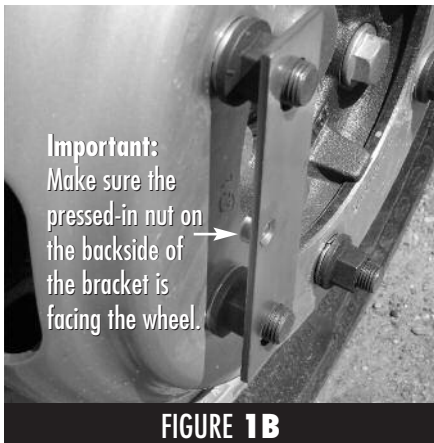
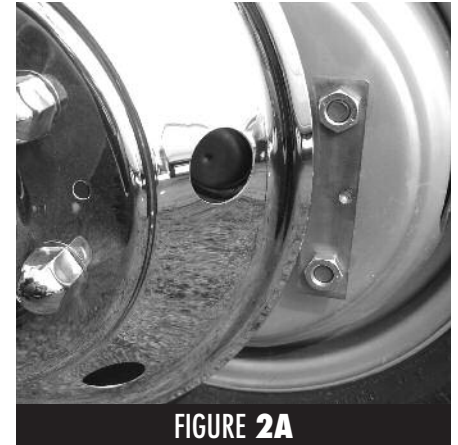
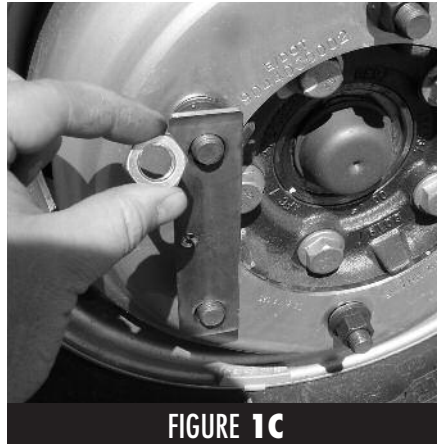


**SPRINTER 15" AND 16" OVER-THE-LUG MOUNTING SYSTEM FRONT SIMULATOR INSTRUCTIONS  
FOR 2006 AND EARLIER**

**VERY IMPORTANT! Read And Understand These Steps Before Installation.**

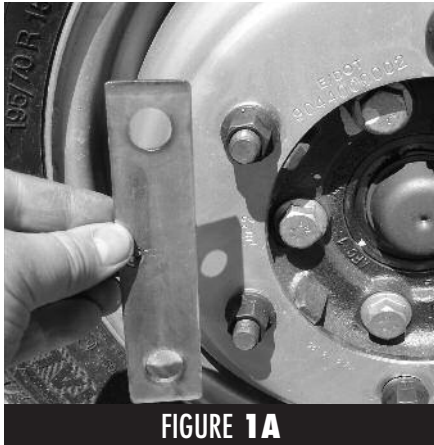

**▲ STEP 1**

**Installing The Mounting Brackets**

- If applicable begin by removing the factory black plastic hubcaps with a 19mm lug wrench. Then securely re-install the lug nuts that were removed from the wheel.
- Next, place one of the front mounting brackets on top of two lug nuts. **Important:** Make sure the pressed-in nut on the backside of the bracket is facing the wheel. (See Figs. 1A & 1B)
- Next, thread two jam nuts over the bracket onto the wheel studs. (See Fig. 1C)
- Repeat the same process for the other side and tighten securely. (See Fig. 1D)

**IMPORTANT: DO NOT USE AIR TOOLS TO TIGHTEN THE BRACKET JAM NUTS.**

**▲ STEP 2**



**Mounting The Simulator To The Wheel**

- Place wheel simulator onto the wheel making sure to line the holes in the simulator with the threaded holes of the mounting brackets. (See Fig. 2A)
- Then thread two Phillips head screws through the simulator and into the threaded holes of the mounting brackets and tighten securely. (See Fig. 2B)
- Repeat the same process on the other wheel and you're finished.

**REAR MOUNTING ON BACKSIDE.**

# SPRINTER 15" AND 16" OVER-THE-LUG MOUNTING SYSTEM REAR SIMULATOR INSTRUCTIONS

**VERY IMPORTANT! Read And Understand These Steps Before Installation.**

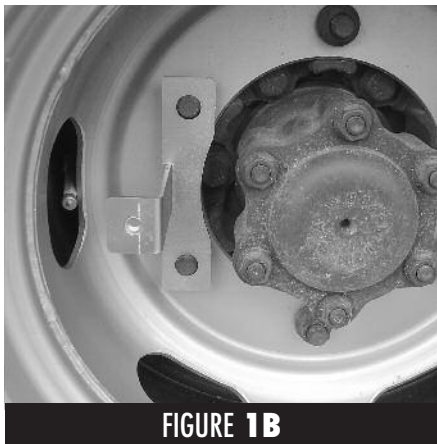
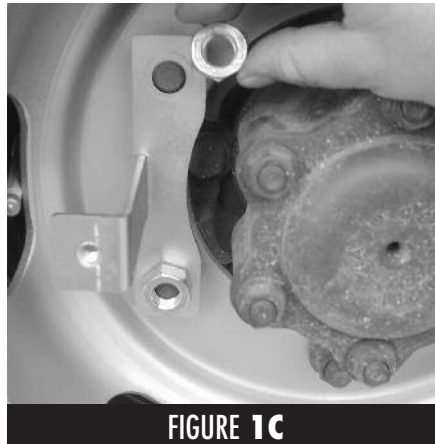


## ▲ STEP 1

### Installing The Mounting Brackets

- If applicable begin by removing the factory black plastic hubcaps with a 19mm lug wrench. Then securely re-install the lug nuts that were removed from the wheel.
- Next, place one of the rear mounting brackets on top of two lug nuts. (See Figs. 1A & 1B)
- Next, thread two jam nuts over the bracket onto the wheel studs. (See Fig. 1C)
- Repeat the same process for the other side and tighten securely. (See Fig. 1D)

**IMPORTANT: DO NOT USE AIR TOOLS TO TIGHTEN THE BRACKET JAM NUTS.**

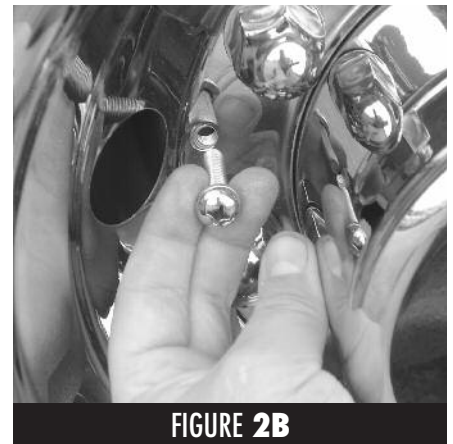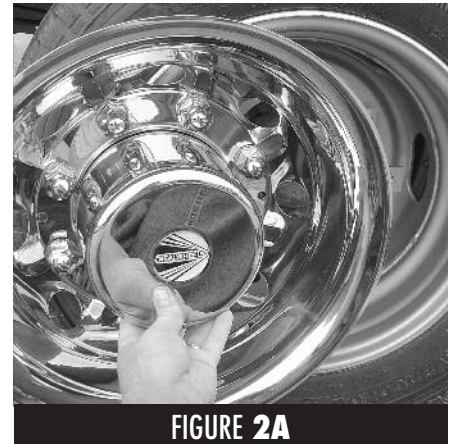

## ▲ STEP 2

### Mounting The Simulator To The Wheel

- Place wheel simulator onto the wheel making sure to line the holes in the simulator with the threaded holes of the mounting brackets. (See Fig. 2A)
- Then thread two Phillips head screws through the simulator and into the threaded holes of the mounting brackets and tighten securely. (See Fig. 2B)
- Repeat the same process on the other wheel and you're finished.

**RealWheels Corporation • 3940 Tannahill Drive • Gurnee, IL 60031**

**847-662-7722 • Fax 847-662-7744 • www.realwheels.com • info@realwheels.com • toll-free 1-800-982-1180**