

INSTALLATION OF LKO MOUNTING SYSTEMS

TOOLS NEEDED



1 1/2" Wrench • It Is Not Necessary To Use Air Tools

VERY IMPORTANT:

Read And Understand These Steps Before Installation!

NOTE:

These instructions are for mounting Over-The-Lug Nut Front Wheel Covers to standard and Super Single Front Wheels using the LKO Mounting Systems. Installation is the same whether mounting Super Single Covers, or covers to standard front wheels.

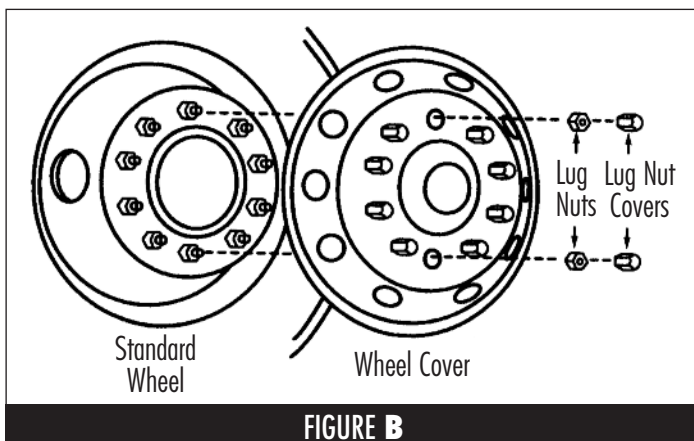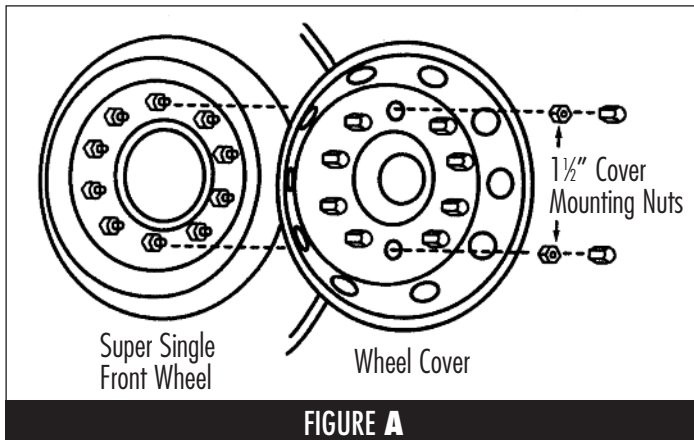


Step 1.

Place the wheel cover onto the wheel by putting the two holes that do not have pre-mounted lug nut covers over two opposing lug nuts on the wheel (See Figure A & B).


Step 2.

With the cover in place, screw the two 1 1/2" mounting nuts (supplied) over the two wheel cover holes. Use right or left threaded nut as needed, making sure that the rounded end is facing out (Figure C).

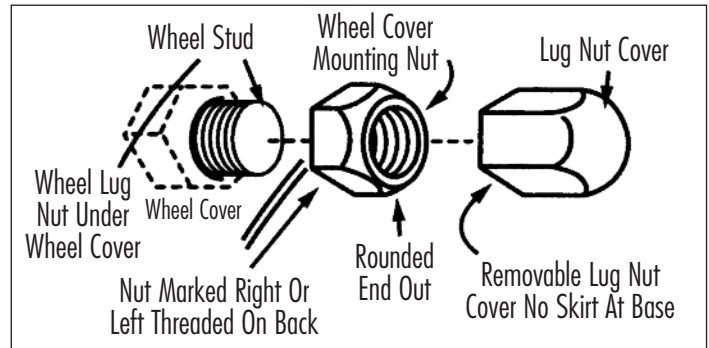

Step 3.

Press the two lug nut covers onto the mounting nuts and the job is complete.

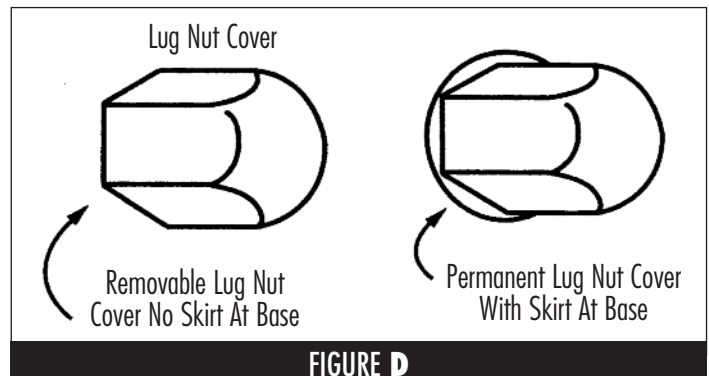

Important Note: To remove the covers for inspection, reverse the process by locating the two lug nut covers that do not have skirts at their bases (See Figure D). Remove them, unscrew the two mounting nuts and then remove the wheel cover.