

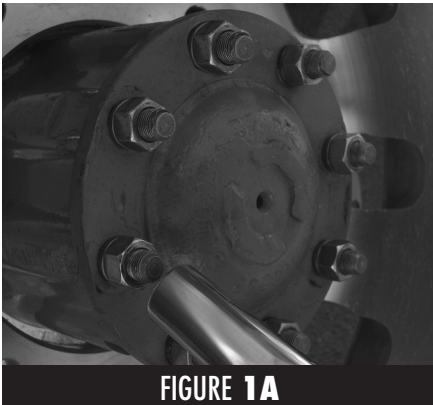
Under Axle Nut Installation of **Rear** Cover-Up Hub Covers • Model RW1015HRK-LCH • Bracket RW1015LCH**VERY IMPORTANT! Read And Understand These Steps Before Installation.**

FIGURE 1A

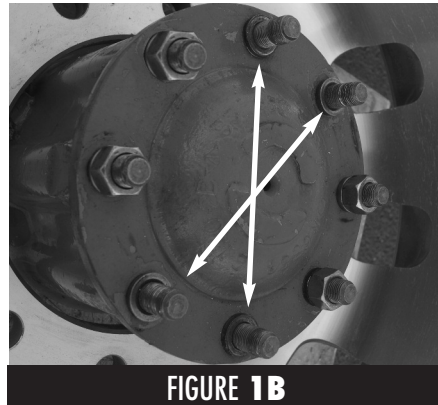


FIGURE 1B



FIGURE 1C

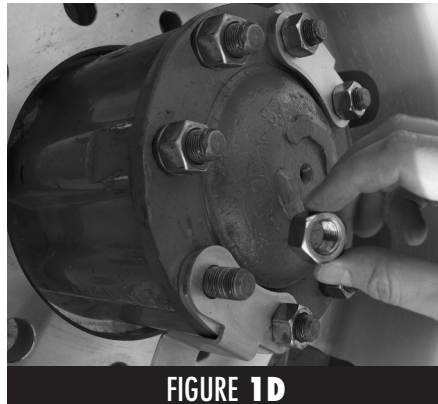


FIGURE 1D

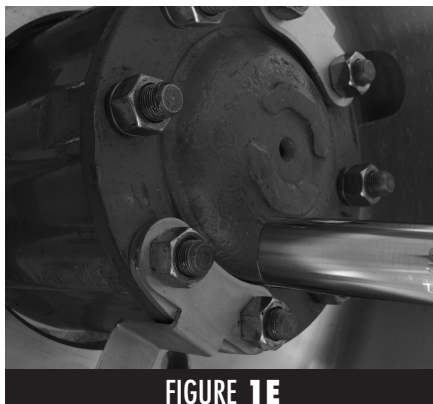


FIGURE 1E

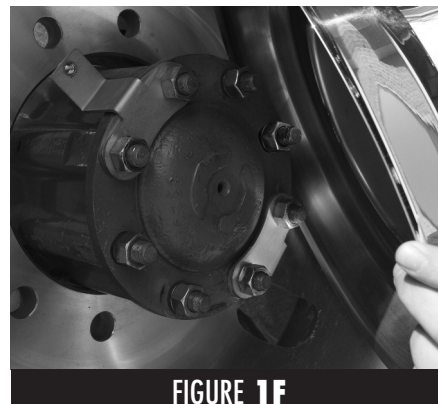


FIGURE 1F

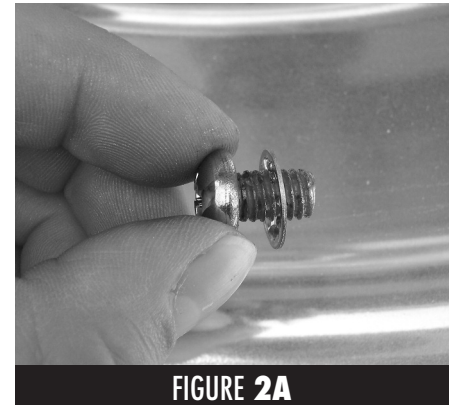


FIGURE 2A



FIGURE 2B

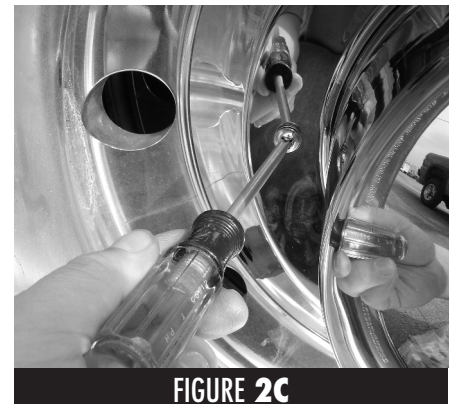


FIGURE 2C

STEP 1 Installing Mounting Brackets

- Using an socket wrench, remove four axle nuts directly across from each other. (See Fig. 1A & 1B)
- Next place the brackets (with angled bracket toward base of hub) onto the axle studs . Using the four nuts that were removed, reinstall. (See Fig. 1C & 1D)
- Retighten all four axle nuts back down to factory torque. (See Fig. 1E & 1F)

▲ STEP 2 Mounting The Hub Cover

- Place Hub Cover onto the wheel making sure to align the holes in the Hub Cover with the threaded holes of the mounting brackets. (See Fig. 2A & 2B)
- Then thread two Phillips head screws with star lock washers through the Hub Cover and into the threaded holes of the mounting brackets and tighten securely. (See Fig. 2C) Repeat the same process on the other wheel and you're finished.

RealWheels Corporation • 3940 Tannahill Drive • Gurnee, IL 60031

847-662-7722 • Fax 847-662-7744 • www.realwheels.com • info@realwheels.com • toll-free 1-800-982-1180